

## 'C' FRAME PRESSES FOR HYDRO-PNEUMATIC CYLINDER (FABRICATED STEEL)

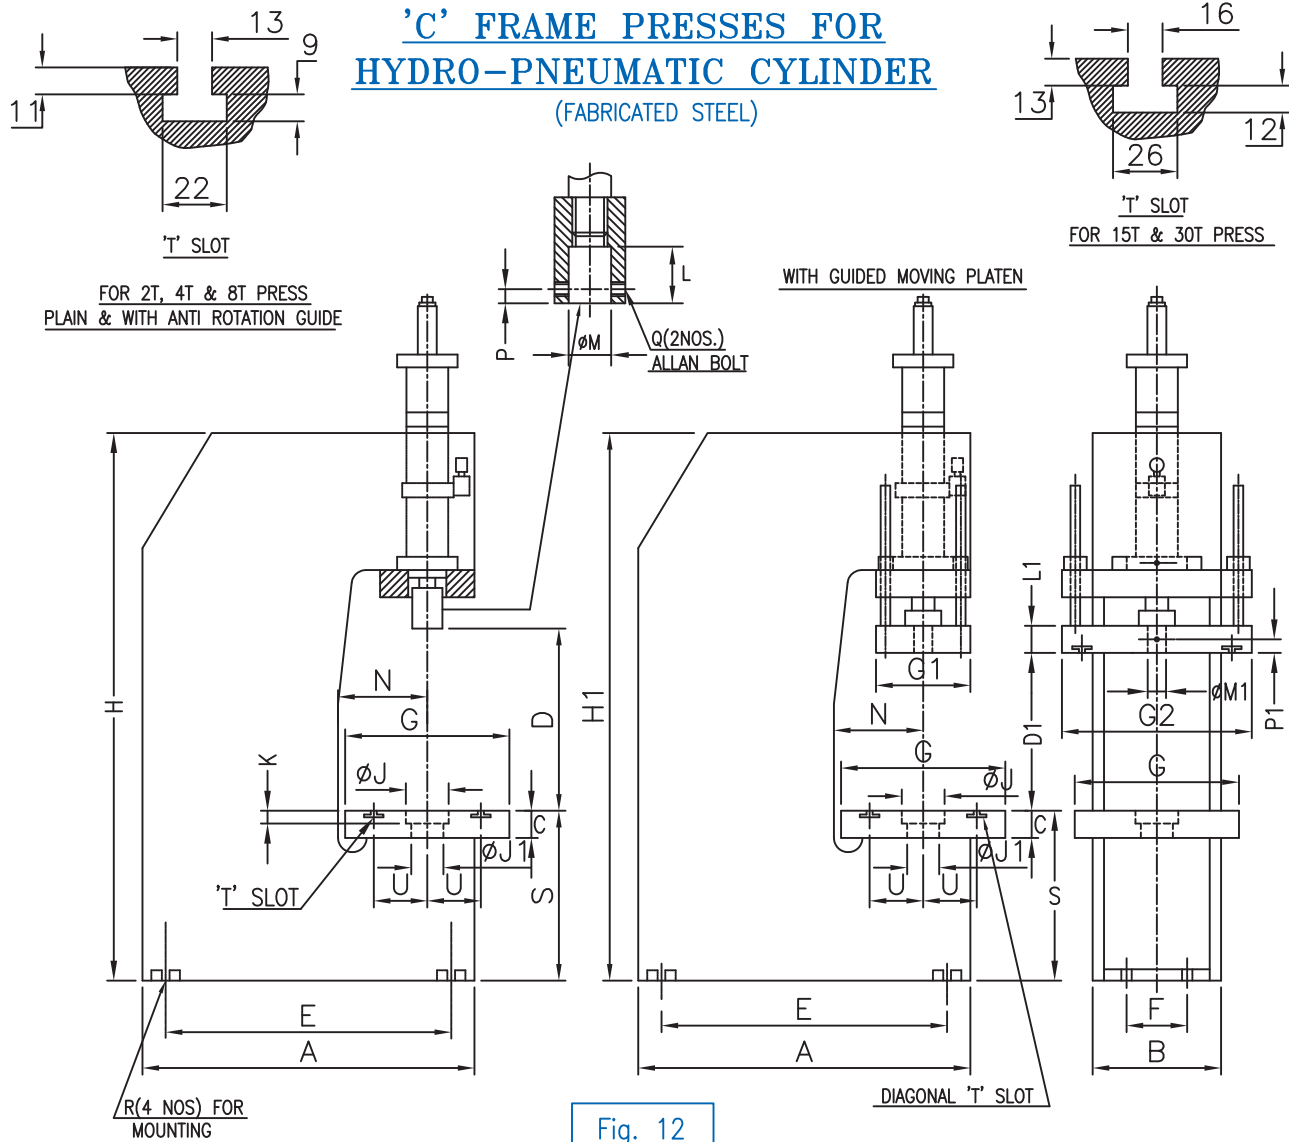


Fig. 12

MODEL NUMBER			DIMENSIONS FOR 6 mm & 12 mm POWER STROKE PRESS																										
PLAIN	WITH ANTI ROTATION GUIDE	WITH GUIDED MOVING PLATE	TON	A	B	C	D	D1	E	F	G	G1	G2	H	H1	J	J1	K	L	L1	M	M1	N	P	P1	Q	R	S	U
IP2C	IP2CA	IP2CG	2	450	180	32	250	220	400	85	230	175	300	780	780	60	45	20	25	32	20	20	125	10	15	M6	13	235	75
IP4C	IP4CA	IP4CG	4	530	220	38	300	260	480	120	280	200	330	900	900	75	55	20	30	38	25	25	150	10	18	M6	13	265	100
IP8C	IP8CA	IP8CG	8	650	300	48	310	260	575	150	350	230	420	1000	1000	105	75	20	40	48	25	25	180	15	24	M8	17	300	100
IP15C	IP15CA	IP15CG	15	700	315	58	350	300	630	150	380	250	450	1180	1180	130	90	25	50	58	30	30	200	15	28	M10	17	370	125
IP30C	IP30CA	IP30CG	30	750	340	68	350	300	680	175	380	250	520	1250	1250	130	90	25	80	68	40	40	200	20	34	M10	17	405	125
MODEL NUMBER			DIMENSIONS FOR 24MM POWER STROKE PRESS																										
PLAIN	WITH ANTI ROTATION GUIDE	WITH GUIDED MOVING PLATE	TON	A	B	C	D	D1	E	F	G	G1	G2	H	H1	J	J1	K	L	L1	M	M1	N	P	P1	Q	R	S	U
IST1C	1IST1CA	1IST1CG	1	450	180	32	250	220	400	85	230	175	300	780	780	60	45	20	25	32	20	20	125	10	15	M6	13	235	75
IST2C	IST2CA	IST2CG	2	450	180	32	250	220	400	85	230	175	300	780	780	60	45	20	30	32	25	20	125	10	15	M6	13	235	75
IST4C	IST4CA	IST4CG	4	530	220	38	300	260	480	120	280	200	330	900	900	75	55	20	40	38	25	25	150	10	18	M6	13	265	100
IST8C	IST8CA	IST8CG	8	650	300	48	310	260	575	150	350	230	420	1000	1000	105	75	20	50	48	30	25	180	15	24	M8	17	300	100
IST15C	IST15CA	IST15CG	15	700	315	58	350	300	630	150	380	250	450	1180	1180	130	90	25	80	58	40	30	200	15	28	M10	17	370	125
IST30C	IST30A	IST30G	30	750	340	68	350	300	680	175	380	250	520	1250	1250	130	90	25	80	68	40	40	200	20	34	M10	17	405	125

NOTE : Due to continuous Developments Dimensions are subject to change without notice